

FORM PTO-1390 (Modified)
(REV 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

30020-68395

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/831063

INTERNATIONAL APPLICATION NO.
PCT/GB99/03659INTERNATIONAL FILING DATE
05 November 1999 (05.11.99)PRIORITY DATE CLAIMED
05 November 1998 (05.11.98)

TITLE OF INVENTION

IMPROVEMENTS IN OR RELATING TO MANUFACTURE OF GLASS ARTICLES OR THE LIKE

APPLICANT(S) FOR DO/EO/US

MILLS, Brian

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)). (UNEXECUTED)
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☒ Certificate of Mailing by Express Mail
23. ☐ Other items or information:

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR 09/831063	INTERNATIONAL APPLICATION NO. PCT/GB99/03659	ATTORNEY'S DOCKET NUMBER 30020-68395
--	--	--

24. The following fees are submitted.:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO **\$1000.00**
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO **\$860.00**
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO **\$710.00**
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) **\$690.00**
- ☐ International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) **\$100.00**

ENTER APPROPRIATE BASIC FEE AMOUNT =**CALCULATIONS PTO USE ONLY****\$860.00**Surcharge of **\$130.00** for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492 (e)).**\$0.00**

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	18 - 20 =	0	x \$18.00
Independent claims	2 - 3 =	0	x \$80.00
Multiple Dependent Claims (check if applicable).			<input type="checkbox"/>
TOTAL OF ABOVE CALCULATIONS			=
<input type="checkbox"/> Applicant claims small entity status. (See 37 CFR 1.27). The fees indicated above are reduced by 1/2.			
SUBTOTAL			=
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492 (f)).			+
TOTAL NATIONAL FEE			=
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).			<input type="checkbox"/>
TOTAL FEES ENCLOSED			=
			Amount to be: refunded
			charged

\$0.00**\$0.00****\$0.00****\$860.00****\$0.00****\$860.00****\$0.00****\$860.00****\$0.00****\$860.00****Amount to be:****refunded**

\$

charged

\$

- a. ☒ A check in the amount of **\$860.00** to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. _____ in the amount of _____ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. **10-0435** A duplicate copy of this sheet is enclosed.
- d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

REZEK, Richard A.
BARNES & THORNBURG
 11 South Meridian Street
 Indianapolis, IN 46204
 US

Richard A. Rezek
 SIGNATURE

Richard A. Rezek

NAME

30,796

REGISTRATION NUMBER

04 May 2001 (04.05.01)

DATE

BARNES & THORNBURG

09/831063
JC18 Rec'd PCT/PTO 04 MAY 2001
11 South Meridian Street
Indianapolis, Indiana 46204
(317) 236-1313

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Group: Unknown

Attorney

Docket: 30020-68395

Applicant: MILLS, Brian

Invention: IMPROVEMENTS IN OR
RELATING TO MANUFACTURE
OF GLASS ARTICLES OR THE
LIKE

Serial No: Unknown

Filed: Herewith

Examiner: Unknown

Certificate Under 37 CFR 1.10

Express Mail Label No.: EL 504 432 019 US

Date of Deposit: 04 May 2001

I hereby certify that this correspondence is being
deposited with the United States Postal Service's
"Express Mail Post Office to Addressee" service
under 37 CFR 1.10 on the date above and is
addressed to the Assistant Commissioner for Patents,
Washington, D.C. 20231, Box PCT, Attn:
DO/EO/US

Karen Taylor

Typed or Printed Name of Person Mailing Paper or
Fee

Signature of Person Mailing Paper or Fee

PRELIMINARY AMENDMENT

TO BE ENTERED PRIOR TO CALCULATING THE FILING FEE

Attention: DO/EO/US
Box PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to calculating the filing fee for the above-identified national patent
application submitted herewith, applicants respectfully request entry of the following
amendments:

In the Description

After the title, please insert the following paragraph:

- - Cross-References to Related Applications

This application is a U.S. national application of international application serial No.
PCT/GB99/03659 filed November 5, 1999, which claims priority to Great Britain Patent
Application No. 9824305.8 filed November 5, 1998. - -

In the Claims

Please amend claims as follows:

1. (Retyped without change) An apparatus for heat treatment of glass articles or the like comprising an oven for receiving one or more glass articles or the like, heater means for heating a fluid medium which is introduced, in use, to an article or articles in the oven, the fluid medium being circulated or recirculated around the article or articles in order to heat up said article or articles in a closely controlled manner by the use of first and second control means, the first control means being arranged, in use, to vary the temperature of a fluid medium and the second control means being arranged, in use, to vary the velocity of a fluid medium introduced to said article or articles.
2. (Retyped without change) An apparatus according to claim 1 in which the first and second control means are arranged to co-operate with one another automatically.
3. (Amended) An apparatus according to claim 1 [or 2] in which the second control means varies the velocity of the fluid medium in response to the temperature of the glass article or articles in the oven.
4. (Amended) An apparatus according to claim 1[, 2 or 3] in which sensor means is provided for sensing the temperature of the glass article or articles.
5. (Retyped without change) An apparatus according to claim 4 in which the sensor is a pyrometer.
6. (Amended) An apparatus according to claim 4 [or 5] in which automatic means is provided for selectively varying the temperature and/or velocity of a fluid medium in response to the temperature sensed by the sensor means.
7. (Amended) An apparatus according to claim 1 [,2 or 3] in which fluid temperature sensor means is provided for sensing the temperature of the fluid medium in order to control the output of the heater means.
8. (Amended) An apparatus according to claim 1 [any preceding claim] in which an impeller is provided to circulate or recirculate fluid medium around the articles.
9. (Amended) An apparatus according to claim 1 [any preceding claim] in which baffle wall portions are provided to help direct fluid medium over the article or articles in a controlled way.
10. (Amended) An apparatus according to claim 1 [any preceding claim] in

which the output of the heater means is variable in response to temperature of the fluid medium being circulated or recirculated.

11. (Retyped without change) An apparatus according to claim 10 in which a fluid medium temperature sensor is provided near to the article or articles being heat treated.

12. (Retyped without change) An apparatus according to claim 11 in which the signal from the fluid medium temperature sensor controls the heater means via a P.I.D. control.

13. (Retyped without change) An apparatus according to claim 4 in which the sensor means for sensing the temperature of the glass article or articles is connected via a P.I.D. control to control velocity of the air being recirculated in the oven.

14. (Retyped without change) A method of heat treatment of glass articles or the like comprising heat treating said articles in a closely controlled manner under dual control comprising controlling the heat output of a heater means and the velocity of fluid medium being circulated or recirculated in a chamber zone of an oven.

15. (Retyped without change) A method according to claim 14 in which the method includes sensing the temperature of the glass article or the like so as to vary the velocity of fluid medium being circulated.

16. (Amended) A method according to claim 14 [or 15] in which the heat output of the heater means is controlled by a sensor sensing the temperature of the fluid medium.


17. (Amended) A method according to claim 14 [,15 or 16] and where the glass articles are flat Cathode Ray Tubes, the method comprising positioning Cathode Ray Tubes vertically and parallel to one another on a vacuum cart proceeding through the plurality of zones of an oven and heat treating said plurality of Cathode Ray Tubes and by directing heated fluid medium in-between Cathode Ray Tubes of said plurality of Cathode Ray Tubes.

18. (Retyped without change) A method according to claim 17 in which the vacuum carts proceed through a plurality of zones of the oven in a time indexed manner, the indexing time between the zones being at least 10 minutes.

REMARKS

This Preliminary Amendment is being submitted to indicate the relationship of the subject U.S. national application to previously filed applications as required under 37 C.F.R. 1.78, to delete multiple dependencies and to place the claims in somewhat better form for examination. With the entry of the foregoing amendments, the application is believed to be in condition for examination and allowance. Consideration of the claims, leading to their allowance and passage of the application to issuance, is respectfully requested.

Respectfully submitted,



Richard A. Rezek
Atty. Reg. No. 30,796
Attorney for Applicant

RAR/hzs/379675
Indianapolis, Indiana 46204
(317) 231-7283

IMPROVEMENTS IN OR RELATING TO MANUFACTURE
OF GLASS ARTICLES OR THE LIKE

This invention relates to improvements in or relating to manufacture of glass articles or the like and is more particularly but not exclusively concerned with heat treatment of Cathode Ray Tubes (CRT).

Our previous patent specification No.GB2300906 relates to a heat treatment oven used in the manufacture of Cathode Ray Tubes and, accordingly, the entire content of patent specification No.GB2300906 is incorporated into this patent specification by reference.

Although the previous oven design shown in patent specification No.GB2300906 works well in practice with the type of Cathode Ray Tubes as shown in the drawings of that patent specification and indeed for various other large glass items, it tends not to be generally suitable for treatment of other glass articles or the like such as the new designs of flatter, thinner Cathode Ray Tubes (Thin CRT) now being designed for incorporation in domestic higher definition "flat screen" television receivers e.g. as produced by Candescent Technology Corporation of U.S.A.

In attempting to use such an oven design for said flatter Cathode Ray Tubes, a much closer control over the temperature of the Cathode Ray Tubes being heat treated is required over time in order to avoid the occurrence of stress lines, cracking or breaking of the Cathode Ray Tubes. Also, a closer control of the temperature of the article being heat treated in the oven may be necessary for articles other than Cathode Ray Tubes.

It is an object of the present invention to at least alleviate the aforementioned, or other, problem associated with heat treatment of glass articles or the like or any articles which may be subject to stress or breakage if not heat treated in an appropriate manner.

According to the present invention there is provided apparatus for the heat treatment of glass articles or the like, comprising an oven for receiving one or more glass articles or the like, heater means for heating a fluid medium such as air which is introduced, in use, to an article or articles in the oven, said fluid medium being circulated or re-circulated around the article or articles in order to heat up said article or articles in a closely controlled manner by the use of first and second control means, the first control means being for varying the temperature of the fluid medium and the second control means being varying the velocity of the fluid medium introduced to said article or articles.

Thus, use of the first and second control means may effectively provide a dual control facility for the oven. The first and second control may be arranged to be automatically co-operable with one another e.g. under the control of a computer.

Preferably, the velocity of the fluid medium can be varied by the second control means in response to the temperature of the glass article/s in the oven; the apparatus, preferably, includes sensor means for sensing the temperature of the glass article or articles (said sensor means possibly being a pyrometer) and/or may include automatic means for selectively varying the temperature and/or velocity of the fluid medium in response to the temperature sensed by said sensor means. Alternatively, separate sensor means may be provided for sensing the temperature of the fluid medium in order to control the output of the heater means. Said automatic control means may include a purpose-made programmed computer system.

The apparatus will usually include a fan or impeller to circulate or re-circulate the fluid medium around the article or articles.

The apparatus may include baffle wall portions to help direct the fluid medium over the article or articles in a controlled way.

The output of the heater means (which may be for example a gas burner or electrical element or any suitable heater means) may be varied in response to the temperature of the fluid medium being circulated/re-circulated and the location for sensing the temperature may be relatively near to the article or articles being heat treated or at any suitable point and there may be more than one sensing point. In any event, the sensing signal may be set to control the heater means via a P.I.D. control.

The sensor means for sensing the temperature of the glass article or articles may be connected via a P.I.D. control and/or an inverter to control velocity of the air being recirculated in the oven for example by a, or the, fan or impeller.

The oven may be divided up into a plurality of chambers or zones and the number of zones will usually depend upon the nature of the articles being heat treated.

Where the glass articles or the like being heat treated are Cathode Ray Tubes of a very flat nature, preferably, said tubes are stacked vertically (or generally upright) in parallel fashion (preferably in two rows) in a vacuum cart that can be progressed through the zones or chamber of the oven. The oven may be generally of a race-track shape.

In such an arrangement, the fluid medium is, preferably, introduced in between the Cathode Ray Tubes by nozzles preferably angled to direct said fluid medium horizontally between said Cathode Ray Tubes. The faces or screens of the Cathode Ray Tubes, preferably, face one another although they may be arranged in front to back opposing relationship. Preferably, the oven has a number of chambers or zones less than 50 and preferably less than 20, preferably less than 10 and possibly only 8 zones.

Preferably, the oven is provided with a track which allows a series of vacuum carts containing the Cathode Ray Tubes to progress through the various zones of the oven.

As many as 40 Cathode Ray Tubes may be provided per vacuum cart.

Each chamber or zone may be provided with horizontal baffle wall portions in an upper portion of the chamber in order to direct fluid medium horizontally at the top of a chamber/zone towards the sides and vertical baffle wall portions to direct the air downwardly at each side to nozzle means introducing the fluid medium over the glass articles.

Preferably, the apparatus has provision for allowing not more than a \pm 5° celsius variation from an ideal temperature gradient for heat treatment of the glass article or articles.

Further according to the present invention there is provided a method of heat treatment of glass articles or the like, comprising heat treating said articles under a dual control means comprising controlling the heat output of a heater means and the velocity of fluid medium being circulated or recirculated in a chamber or zone of the oven. The method, preferably, includes sensing the temperature of the glass article or the like in order to vary the velocity of the fluid medium being circulated/re-circulated in said chamber or zone and the heat output of the heater means is, preferably, controlled by sensor sensing the temperature of said fluid medium.

Where the glass articles are flat Cathode Ray Tubes, preferably, said method comprises heat treating a plurality of said Cathode Ray Tubes which are, preferably, positioned vertically and parallel to one another on vacuum carts that proceed through a plurality of zones of the oven, preferably in a time indexed manner; said fluid medium, preferably, being directed (preferably horizontally) in between the Cathode Ray Tubes during the heat treatment process.

In said method, the indexing time between zones is, preferably, at least 10 minutes but may be 12 or 16 minutes.

Still further according to the present invention there is provided apparatus for the heat treatment of Cathode Ray Tubes or the like and simultaneously evacuating said Cathode Ray Tubes, said apparatus comprising an oven for receiving the Cathode Ray Tubes and said oven consisting of a number of heat treatment zones or chambers through which the Cathode Ray Tubes can be indexed according to a heat treatment time schedule, means for transporting the Cathode Ray Tubes through the zones or chambers of the oven, temperature control means for controlling the temperature of each zone or chamber, said temperature control means including means to vary the output of a heater and also means to vary the velocity of a fluid medium being circulated or recirculated within the chamber or zone, preferably, by monitoring the temperature of the Cathode Ray Tube or Tubes; preferably each zone or chamber includes baffle means for directing the flow of fluid medium in the chamber or zone in between the Cathode Ray Tubes, preferably, through nozzles directed in between facing screens of the Cathode Ray Tubes or facing backs of the Cathode Ray Tubes or front to back configuration of Cathode Ray Tubes.

Still further according to the present invention there is provided apparatus for the heat treatment of glass articles or the like, comprising one or more of the following features:-

- a) an oven with dual control including varying the temperature by controlling the output of heater means and controlling the velocity of a fluid medium surrounding the articles in the oven
- b) baffle means constructed to direct air flow in a desired manner
- c) means sensing the temperature of glass articles directly.
- d) an oven with only 8 zones
- e) a computerised system to automatically balance the dual control of a), preferably to allow a $\pm 5^{\circ}$ celsius tolerance in temperature gradient
- f) an oven capable of heat treating simultaneously a plurality of very flat Cathode Ray Tubes in a zone or chamber of the oven whilst simultaneously evacuating the C.R.T.'s
- g) a plurality of nozzles to introduce fluid medium generally horizontally or in between glass articles preferably stacked upright.

Still further according to the present invention there is provided apparatus for heat treatment of glass articles or the like having any feature or

combination of features derivable from this description and drawings.

Many advantageous apparatus and method features will be apparent from the following description and drawings.

An embodiment of apparatus and method for the heat treatment of glass articles or the like is now described, by way of example only, with reference to the accompanying much simplified FIGURES of the drawings, in which:-

FIGURE 1 shows a vertical cross-sectional view through an oven of apparatus in accordance with the present invention;

FIGURE 2 shows a sectional part-elevation plan view of the oven shown in FIGURE 1, and

FIGURE 3 shows graphical data relating to the heat treatment method in accordance with the present invention.

Referring to FIGURES 1 and 2 of the drawings, apparatus for heat treatment of glass articles or the like (in this instance a plurality of flat Cathode Ray Tubes C) is in the form of a heat treatment oven 1. The oven 1 defines a plurality of inner chambers or zones 2 (only one zone shown) for receiving the Cathode Ray Tubes C stacked in two rows and vertically oriented with the front faces or screens C₁ of the tubes C facing one another. more

particularly as shown in FIGURE 2. Although FIGURE 2 shows only two rows of three Cathode Ray Tubes C, in practice, there may be twenty Cathode Ray Tubes C in each row mounted in a single vacuum cart (not shown) which is able to move through different control chambers or zones 2 of the oven 1, in a manner similar to that as described in patent specification No.GB2300906. Thus, the overall shape of the oven 1 may be similar to the general race-track shape as shown in FIGURE 3 of patent specification No.GB2300906, except that, advantageously, it is envisaged that far fewer control chambers or zones 2 will be needed through which the vacuum cart carrying the Cathode Ray Tubes C needs to travel in order to complete the heat treatment process. Previously, in order to complete the heat treatment process on Cathode Ray Tubes of the design as shown in patent specification No.GB2300906, as many as fifty different control chambers or zones were needed to be provided for the vacuum carts to advance through, along the general race-track shape of the oven. Advantageously, the Cathode Ray Tubes C as shown in FIGURES 1 & 2 of the drawings may only need to be subjected to about eight control chambers or zones and they will spend longer time periods in the zones than in said previous design, in a manner to be explained later on in this specification.

The oven 1 includes for each zone or chamber 2 a heating means in the form of a gas burner or electric element 3 and the fluid medium (air) in the

zone or chamber 2 is circulated or re-circulated around the zone or chamber in the direction of the arrows and particularly in between the Cathode Ray Tubes C (arrows a_5 to a_{10}) in a manner which should be generally self-explanatory from FIGURES 1 and 2 of the drawings.

A train of vacuum carts (not shown) each containing forty Cathode Ray Tubes C can be advanced sequentially through the different chambers or zones 2 of the oven 1 on a track (not shown) which may be of the general race-track form shown in FIGURE 3 of GB patent specification No.2300906, in a manner which should be readily appreciated. Each Cathode Ray Tube C is supported on an exhaust duct 4 operatively connected to the envelope of the Cathode Ray Tube C so that the Cathode Ray Tubes C are transported through the chambers or zones of the oven 1 with a vacuum cart. During transport through the oven 1, the vacuum carts can be operated automatically in a manner known per se to exhaust the interior of each of the Cathode Ray Tubes C.

The general form of the oven could be similar to that as described in GB patent specification No.GB2300906 with loading and unloading stations (not shown) provided along part of the outside structure of the track.

The air within each zone or chamber 2 may be re-circulated by a fan or impeller 5 including a fan blade unit 5a arranged to rotate about a vertical

axis in order to direct air outwardly and horizontally in direction of the arrows a_1 and a_2 directed by the presence of horizontal baffle wall portions W_1 & W_2 before being forced downwardly in direction of arrows a_3 and a_4 . The air flow in the direction of arrows a_3 and a_4 is directed by the presence of vertical baffle wall portions W_3 and W_4 , before collecting towards the bottom of the chamber in the larger volume compartments v_1 and v_2 defined in part by horizontal wall portions w_5, w_6, w_7, w_8 and vertical wall portions w_9, w_{10} ; the air is then forced through a series of horizontally directed nozzle n (in direction of arrows a_5, a_6, a_7, a_8, a_9 and a_{10}) in between the opposed front faces C_1 of the Cathode Ray Tubes and in between the opposed rear faces C_2 , in a manner which should be self-evident from the drawings. Next, the air flows generally in the direction of arrows a_{11} and a_{12} and upwardly in direction of arrows a_{13} and a_{14} past the burning flame f of the heating means (in this instance gas burner 3) in order to be heated and re-circulated by the fan 5.

Each Cathode Ray Tube C may have a length dimension of approximately 300mm and a width dimension of approximately 15mm, said width dimension being very much thinner than, for example, the Cathode Ray Tubes shown in patent specification No.GB2300906. Consequently, the control of the heat treatment process needs to be much more accurate or otherwise the Cathode Ray Tubes will be subject to excess stress or damage, namely cracking or breaking of the glass screen.

In the previous oven mentioned in patent specification No.GB2300906, air is forced downwardly over the upwardly oriented front screen or face of a single Cathode Ray Tube per cart, in a heating zone of the oven and then the air is drawn-up through exhaust ducts in side walls of the oven. Each Cathode Ray Tube needs to be brought through a heat treatment cycle in which the temperature of the glass is raised at a steady rate for a set time period, kept at that temperature for a further time period and allowed to cool down steadily within a further set time period. Variations from the desired C.R.T. temperature gradient through the oven needs to be kept within various limits or tolerances, in order to avoid damage to the Cathode Ray Tubes. Regulation of the zone environment is made by monitoring and controlling the air temperature via the heating means, whereas in the present invention the output of the heating means to heat the air can be adjusted in order to vary the temperature of the air and thus of the Cathode Ray Tubes but, additionally, the velocity of the air circulating around the oven zone can also be controlled by varying the speed of the fan 5. Thus, for the first time a dual control facility exists within the oven zone, namely control of the heating means and control of the velocity of the fan (to separately control the velocity of the circulating air) in order to add an extra dimension of control allowing finer tolerances in the temperature gradient for the glass to be exacted. The output of the heating means 3 is controlled by sensing the temperature of the air by means of a

sensor (not shown) located generally at 6 in FIGURE 1, being controlled by means of a P.I.D. control input 7. A second P.I.D. control 8 enabling said dual control to be carried out is established by means of measuring or monitoring the temperature of the glass of the Cathode Ray Tubes C by means of a sensor located generally at position 9, so that the velocity of the fan 5 can be controlled via an inverter 10.

It is envisaged that the complete heat treatment cycle of the Cathode Ray Tubes C will be continuously monitored and controlled via a purpose made computerised system suitably programmed to ensure that the temperature of the Cathode Ray Tubes throughout the cycle does not vary from the desired temperature gradients more than the allowed tolerance range, which will usually be within ± 5 degrees.

FIGURE 3 shows an example of a temperature gradient for part of a heating cycle for a Cathode Ray Tube C. FIGURE 3 shows a heating rate of 20 degrees celsius to 223 degrees celsius set as a linear function. Temperature steps may then be set in incremental set points of for example 40 degrees celsius steps. FIGURE 3 shows the theoretical desired glass temperature gradient X for a first part of the heating cycle on which is superimposed the actual temperature Y of the glass of the Cathode Ray Tube C and the air temperature setting Z. When the temperature of the glass is found to be below

the theoretical required glass temperature at a particular point in time the velocity of the re-circulating air is increased by increasing the speed of the fan 5, thereby increasing the heat transfer co-efficient, or if the temperature of the glass is above the desired glass temperature gradient X the velocity of the fan can be decreased, thus giving a fine control band. FIGURE 3 shows that there is much greater variation in the air temperature setting from the desired glass temperature and thus, advantageously, the control of the air speed is determined by sensing the glass temperature (directly) rather than for example, sensing the air temperature. However, control of the output from the heating means 4 is done by sensing the air temperature at 6.

It is also an advantage of embodiments of the present invention that less floor space may be required for the oven 1 than in previous oven designs needing for example 50 zones in order to achieve a similar heat treatment cycle. Additionally, the power requirements of the apparatus in accordance with the present invention may well be much better than with previous designs. Still further, the apparatus 1 should be able to provide a much quicker response to a variation in temperature of a Cathode Ray Tube because of the dual facility for temperature control, in particular the velocity of the re-circulating air being controlled in response to the temperature of the glass. In the previous arrangement shown in patent specification No.GB2300906, the usual indexing time is between 20 and 35 seconds (the amount of time spent

by a vacuum cart in each zone before being indexed to the next zone) whereas it is envisaged with embodiments in accordance with the present invention that the indexing time may well be 12-16 minutes.

Overall, therefore, embodiments of the present invention may be extremely advantageous in manufacturing items such as flat Cathode Ray Tubes that need to be brought through a heat treatment cycle but which are subject to stress, breakage or cracking if not heat treated in a readily controllable manner. Thus, such articles may be of glass or the like but could be of any other material where such problems might exist or where the article needs to be brought through a very precisely controlled heat treatment process.

It is to be understood that the scope of the present invention is not to be unduly limited by the particular choice of terminology and that a specific term may be replaced by any equivalent or generic term. For example the term "Cathode Ray Tube" may be replaced by "television receiver" or television tube/screen or the like. The term "computer" may be replaced by "microprocessor". The singular may include the plural or vice versa.

Further it is to be understood that individual features, method or functions related to the apparatus might be individually patentably inventive. In particular, any disclosure in this specification of a range for a variable or

parameter shall be taken to include a disclosure of any selectable or derivable sub-range within that range and shall be taken to include a disclosure of any value for the variable or parameter lying within or at an end of a range.

Further according to the present invention there is provided an article or C.R.T. heat treated using apparatus in accordance with any apparatus statement of invention in this specification or made by any method statement of invention in this specification.

CLAIMS:-

1. An apparatus for heat treatment of glass articles or the like comprising an oven for receiving one or more glass articles or the like, heater means for heating a fluid medium which is introduced, in use, to an article or articles in the oven, the fluid medium being circulated or recirculated around the article or articles in order to heat up said article or articles in a closely controlled manner by the use of first and second control means, the first control means being arranged, in use, to vary the temperature of a fluid medium and the second control means being arranged, in use, to vary the velocity of a fluid medium introduced to said article or articles.
2. An apparatus according to claim 1 in which the first and second control means are arranged to co-operate with one another automatically.
3. An apparatus according to claim 1 or 2 in which the second control means varies the velocity of the fluid medium in response to the temperature of the glass article or articles in the oven.
4. An apparatus according to claim 1, 2 or 3 in which sensor means is provided for sensing the temperature of the glass article or articles.
5. An apparatus according to claim 4 in which the sensor is a pyrometer.

6. An apparatus according to claim 4 or 5 in which automatic means is provided for selectively varying the temperature and/or velocity of a fluid medium in response to the temperature sensed by the sensor means.
7. An apparatus according to claim 1, 2 or 3 in which fluid temperature sensor means is provided for sensing the temperature of the fluid medium in order to control the output of the heater means.
8. An apparatus according to any preceding claim in which an impeller is provided to circulate or recirculate fluid medium around the articles.
9. An apparatus according to any preceding claim in which baffle wall portions are provided to help direct fluid medium over the article or articles in a controlled way.
10. An apparatus according to any preceding claim in which the output of the heater means is variable in response to temperature of the fluid medium being circulated or recirculated.
11. An apparatus according to claim 10 in which a fluid medium temperature sensor is provided near to the article or articles being heat treated.

12. An apparatus according to claim 11 in which the signal from the fluid medium temperature sensor controls the heater means via a P.I.D. control.
13. An apparatus according to claim 4 in which the sensor means for sensing the temperature of the glass article or articles is connected via a P.I.D. control to control velocity of the air being recirculated in the oven.
14. A method of heat treatment of glass articles or the like comprising heat treating said articles in a closely controlled manner under dual control comprising controlling the heat output of a heater means and the velocity of fluid medium being circulated or recirculated in a chamber zone of an oven.
15. A method according to claim 14 in which the method includes sensing the temperature of the glass article or the like so as to vary the velocity of fluid medium being circulated.
16. A method according to claim 14 or 15 in which the heat output of the heater means is controlled by a sensor sensing the temperature of the fluid medium.
17. A method according to claim 14, 15 or 16 and where the glass articles are flat Cathode Ray Tubes, the method comprising positioning Cathode Ray Tubes vertically and parallel to one another on a vacuum cart proceeding

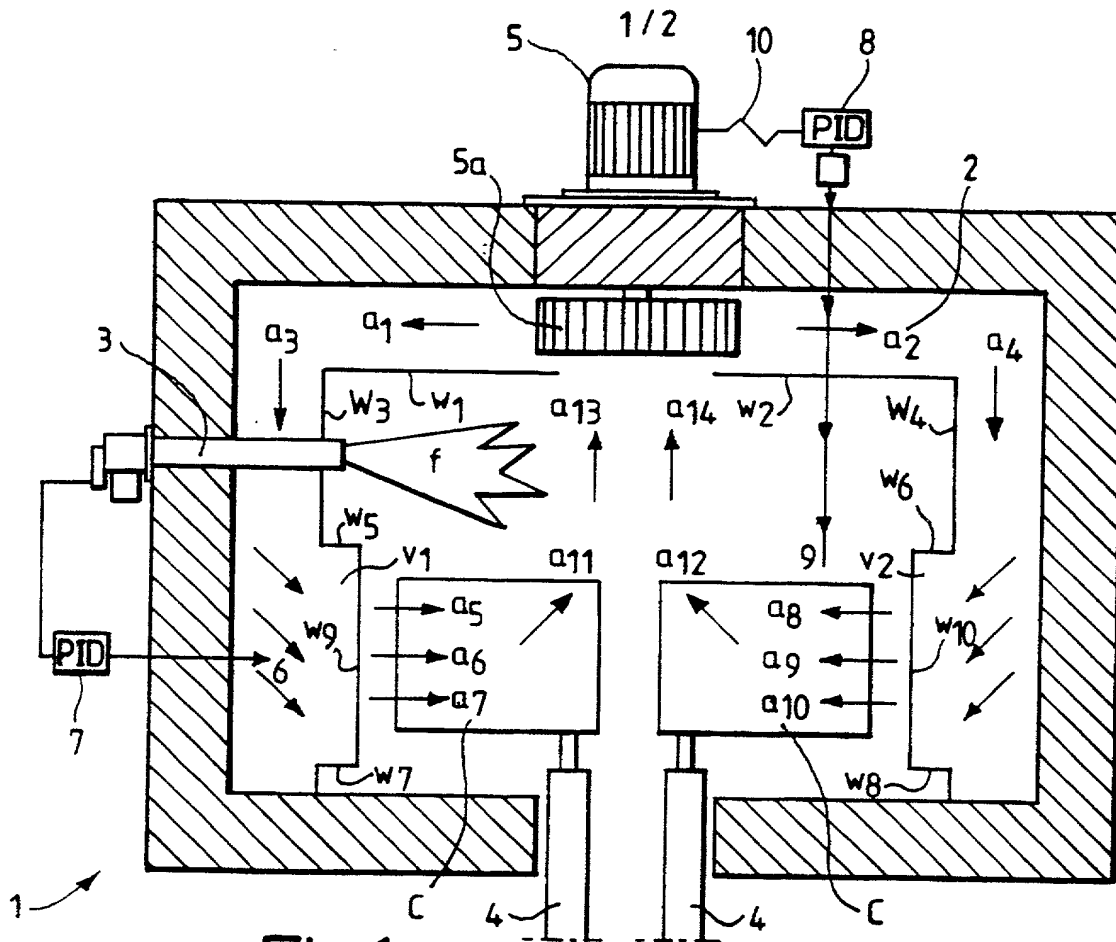


Fig.1.


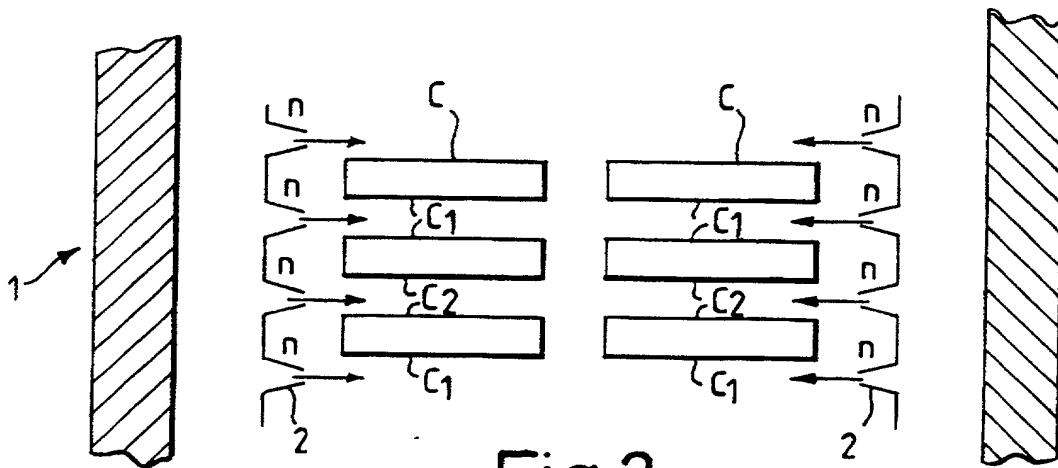


Fig.2.

Fig.3.
Glass / Air Profiles

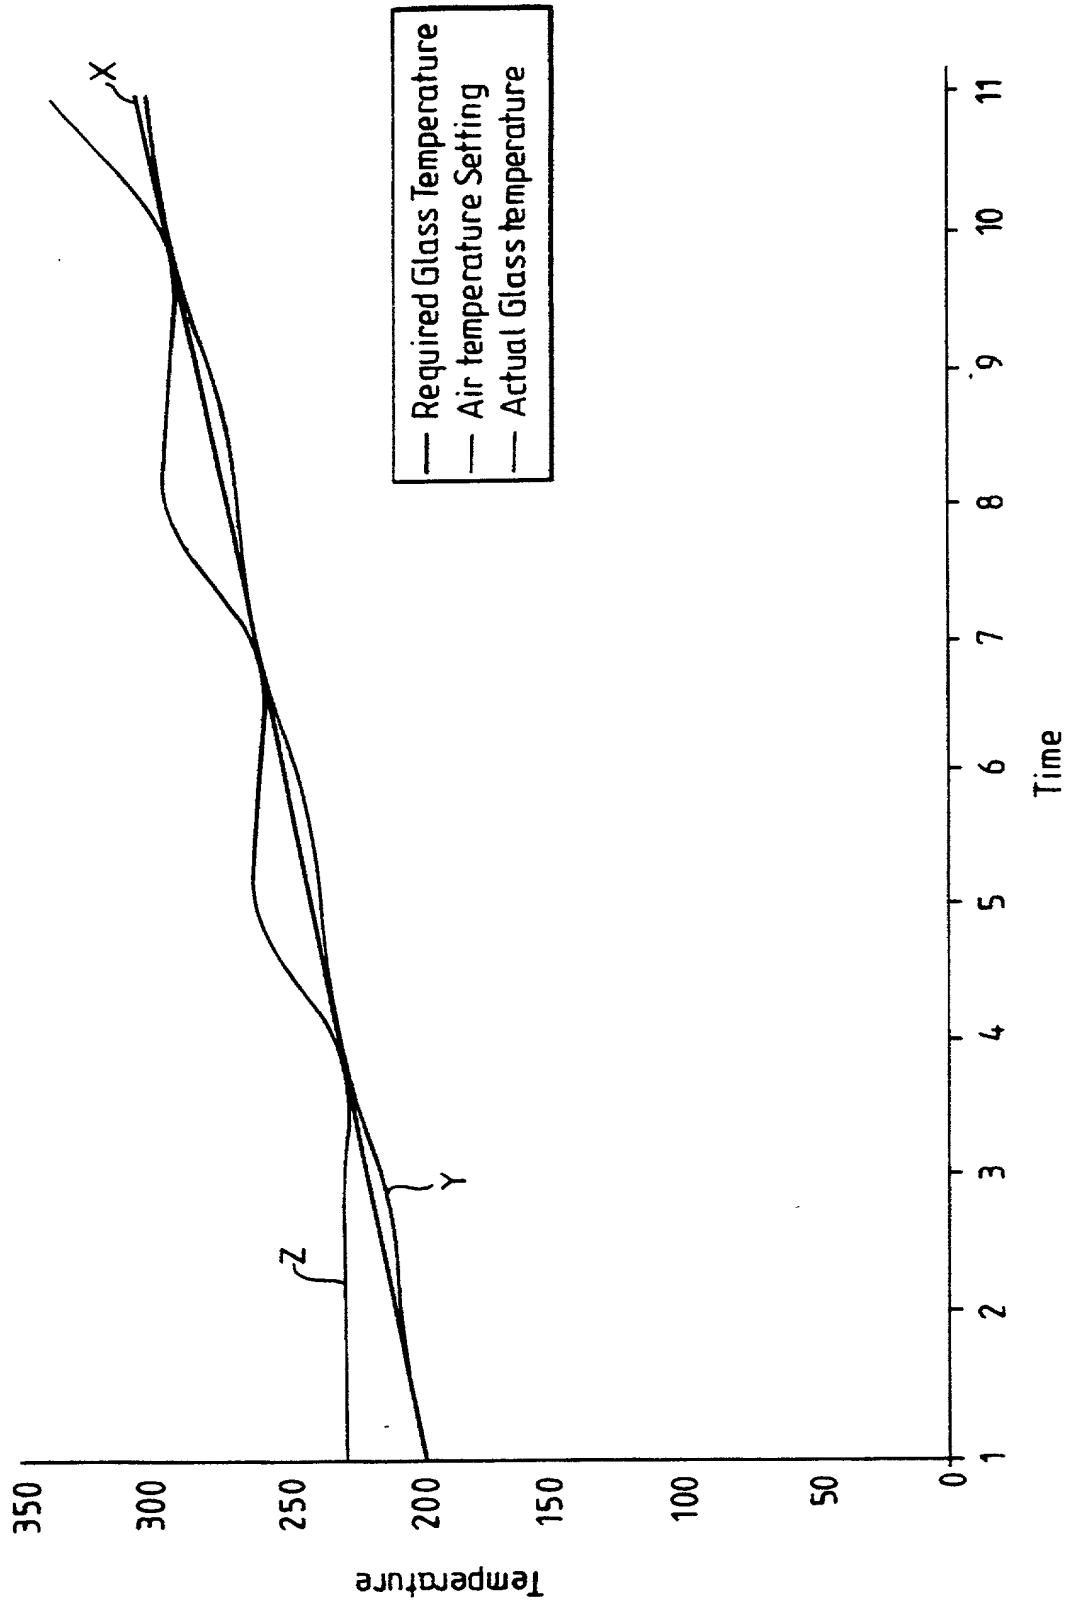

DECLARATION AND POWER OF ATTORNEY -- PATENT APPLICATION

As a below named inventor, I hereby declare that I believe I am the original, first and sole inventor (*if only one name is listed below*) or an original, first and joint inventor (*if plural names are listed below*) of the subject matter which is claimed and for which a patent is sought in the application entitled:

IMPROVEMENTS IN OR RELATING TO MANUFACTURE OF GLASS ARTICLES OR THE LIKE

the specification of which

(check one)

_____ is attached hereto

X was filed on 05 November 1999 (05.11.99) as

United States Application Serial No. _____ or _____

PCT International Application No. PCT/GB99/03659

and was amended on 31 October 2000 (31.10.00) and 04 May 2001 (04.05.01)

(if applicable)

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to herein.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate on which priority is claimed (as listed below) and I have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

9824305.8	United Kingdom (GB)	05 November 1998 (05.11.98)	XX	
(Number)	(Country)	(Day/Month/Year Filed)	Yes	No

(Number)

(Country)

(Day/Month/Year Filed)

Yes

No

(Number)

(Country)

(Day/Month/Year Filed)

Yes

No

I hereby claim benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

Application Number

Filing Date

Application Number

Filing Date

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(b) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.

Filing Date

Status-patented, pending, abandoned

Application Serial No.

Filing Date

Status-patented, pending, abandoned

I hereby appoint William R. Coffey, Reg. No. 24023; Arland T. Stein, Reg. No. 25062; Nancy J. Harrison, Reg. No. 27083; Richard D. Conard, Reg. No. 27321; Dilip A. Kulkarni, Reg. No. 27510; Steven R. Lammert, Reg. No. 27653; Richard A. Rezek, Reg. No. 30796; David B. Quick, Reg. No. 31993; Paul B. Hunt, Reg. No. 37154; Sue Corbett Watson, Reg. No. 38850; Jill T. Powlick, Reg. No. 42088; William B. Richards, Reg. No. 44301; Jay S. Paranjpe, Reg. No. 45486; James R. Sweeney II, Reg. No. 45670; Dustin S. DuBois, Reg. No. 46233; Christopher E. Haigh, Reg. No. 46377; Rebecca Ball, Reg. No. 46535; Perry Palan, Reg. No. 26213; Mark M. Newman, Reg. No. 31472; David E. Herron, Reg. No. 46467; Bobby B. Gillenwater, Reg. No. 31105;


Gregory S. Cooper, Reg. No. 40965; Scott M. Lohnes, Reg. No. 45451; Thomas J. Donovan, Reg. No. 33231; Alice O. Martin, Reg. No. 35601; Grant H. Peters, Reg. No. 35977; Mark A. Hamill, Reg. No. 37145; Michael B. Allen, Reg. No. 37582; and Mark D. Maloney, Reg. No. 43771, as attorneys of record with full power of substitution and revocation, to prosecute this application, and to transact all business in the Patent and Trademark Office connected therewith, and I specify that communications regarding the application be directed to:

BARNES & THORNBURG
11 South Meridian Street
Indianapolis, Indiana 46204
Telephone (317) 236-1313

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1-00
Brian MILLS

Full Name of Sole or First Joint Inventor


Inventor's Signature

1 Springfield Park, Clee Hill

NR Ludlow, Shropshire SY8 3QY

Residence and Post Office Address

Full Name of Second Joint Inventor

Inventor's Signature

Residence and Post Office Address

Full Name of Third Joint Inventor

Inventor's Signature

Residence and Post Office Address

Great Britain (GB)

Country of Citizenship

Date

21 / 5 / 2001.

Country of Citizenship

Date

Country of Citizenship

Date